

Part Number	Load Rating (lbs.)		Max Transmissibility
	Vehicular	Airborne	
FM08-N01	1 — 3	0.25 — 2	2.5

Table 1: Performance Characteristics

Materials:

- Metal Parts: Stainless Steel
- Resilient Element: Neoprene

Damping Medium:

- VHDS Silicone Gel

Operating Temperature:

- -40°F to 195°F

Natural Frequency:

- 10 to 25 Hz

Axial/Radial Frequency Ratio:

- 1 : 1 Approximately

Weight:

- 8 oz.

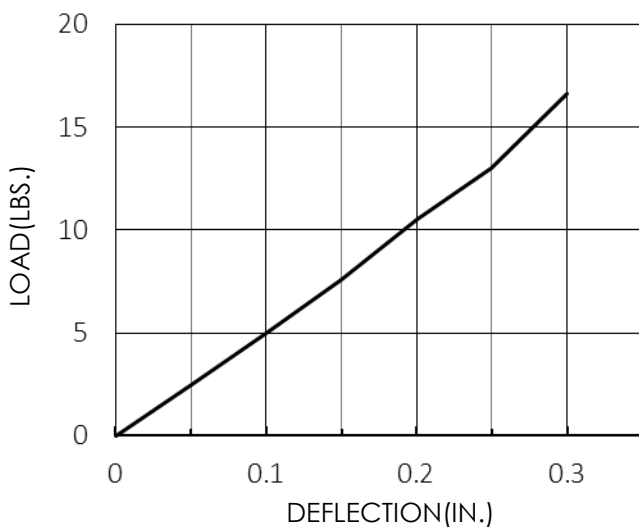


Figure 1: Load Vs. Deflection

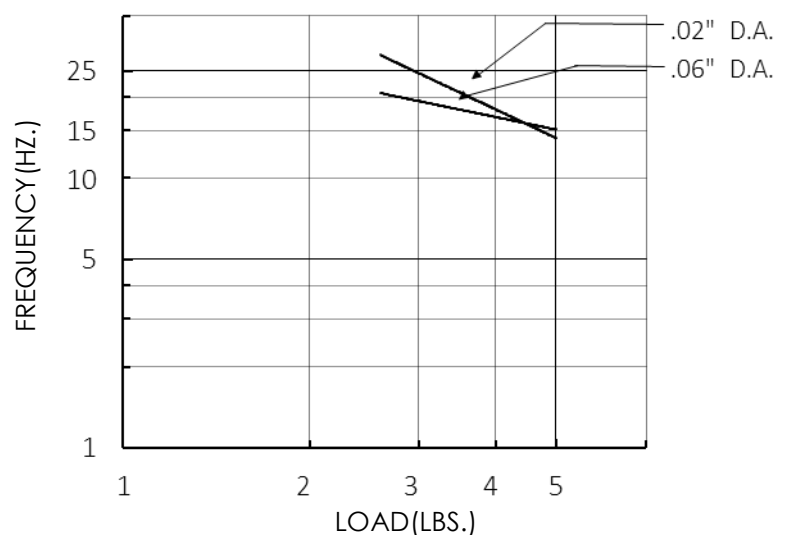


Figure 2: Load Vs. Frequency