

Part Number	Load Rating (lbs.)	Max Transmissibility
CMC-S01	5 — 8	4
CMC-S02	7 — 13	4
CMC-S03	13 — 20	4

Table 1: Performance Characteristics

Materials:

- Metal Parts: Aluminum
- Resilient Element: VHDS Silicone

Operating Temperature:

- -60°F to 300°F

Natural Frequency:

- 10 to 13 Hz

Axial/Radial Frequency Ratio:

- 1 : 1.2 Approximately

Weight:

- 4.0 oz.

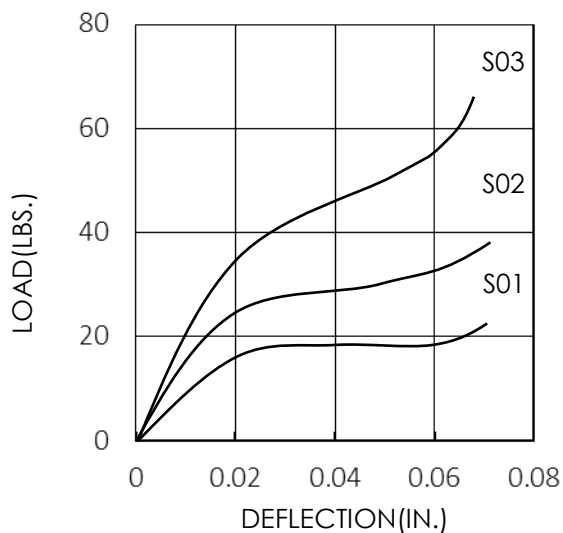


Figure 1: Load Vs. Deflection

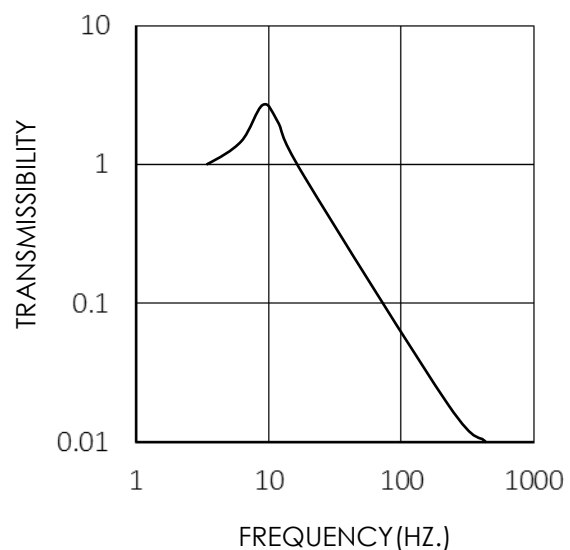


Figure 2: Typical Transmissibility Curve