

Style	Part Number	Load Rating (lbs.)	Max Transmissibility
Plate Type	CP21-S01	4.5	4
	CP21-S02	7	4
	CP21-S03	10	4
Cup Type	CP22-S01	4.5	4
	CP22-S02	7	4
	CP22-S03	10	4

**Table 1: Performance Characteristics**

Note: CP20 is CP21 without a center plate

**Materials:**

- Metal Parts: Aluminum Base  
Zinc plated steel Core
- Resilient Element: VHDS Silicone

**Operating Temperature:**

- -60°F to 300°F

**Natural Frequency:**


- 25 to 40 Hz

**Axial/Radial Frequency Ratio:**


- 1 : 1 Approximately

**Weight:**


- Plate Type: 0.37 oz
- Cup Type: 0.70 oz

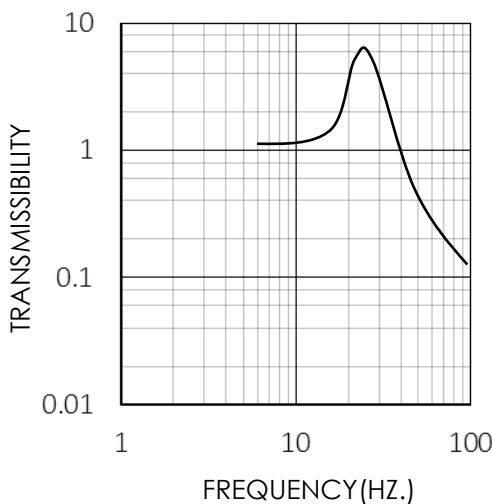

**Figure 1: Typical Transmissibility Curve**

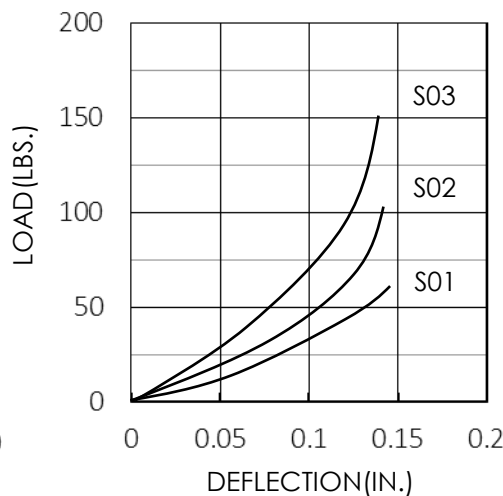

**Figure 2: Load Vs. Deflection**

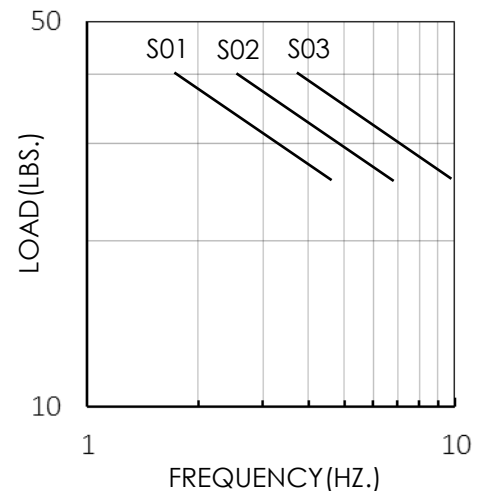

**Figure 3: Load Vs. Frequency**