

Part Number	Load Rating (lbs.)		Max Transmissibility
	Vehicular	Airborne	
FM20-N01	18 — 33	13 — 18	2.5

**Table 1: Performance Characteristics**

**Materials:**

- Metal Parts: Stainless Steel
- Resilient Element: Neoprene

**Damping Medium:**

- VHDS Silicone Gel

**Operating Temperature:**

- -40°F to 195°F

**Natural Frequency:**


- 10 to 25 Hz

**Axial/Radial Frequency Ratio:**


- 1 : 0.7 Approximately

**Weight:**

- 8.0 oz.

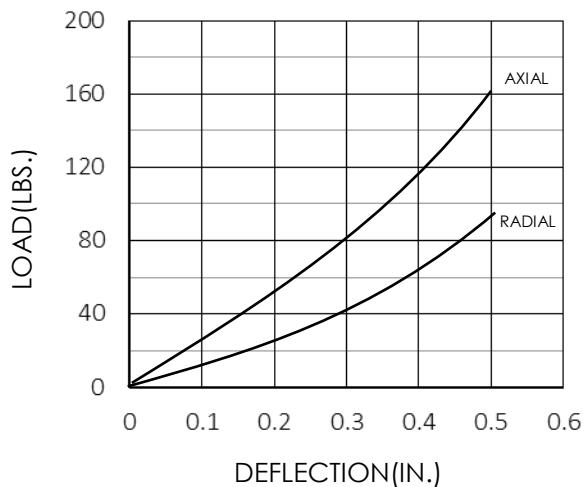

**Figure 1: Load Vs. Deflection**

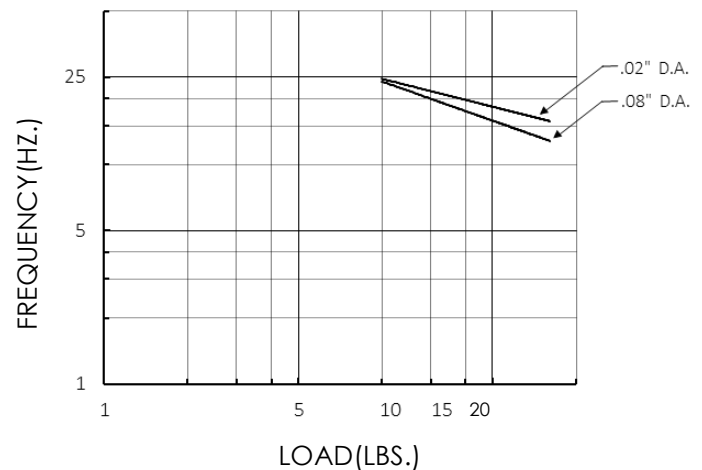

**Figure 1: Load Vs. Frequency**