

Part Number	Load Rating (lbs.)	Max Transmissibility
FM26-S01M	6 — 11	2.5

Table 1: Performance Characteristics

Materials:

- Metal Parts: Stainless Steel
- Resilient Element: Silicone

Damping Medium:

- VHDS Silicone Gel

Operating Temperature:

- -40°F to 195°F

Natural Frequency:

- 6 to 10 Hz

Axial/Radial Frequency Ratio:

- 1 : 1 Approximately

Weight:

- 8.0 oz.

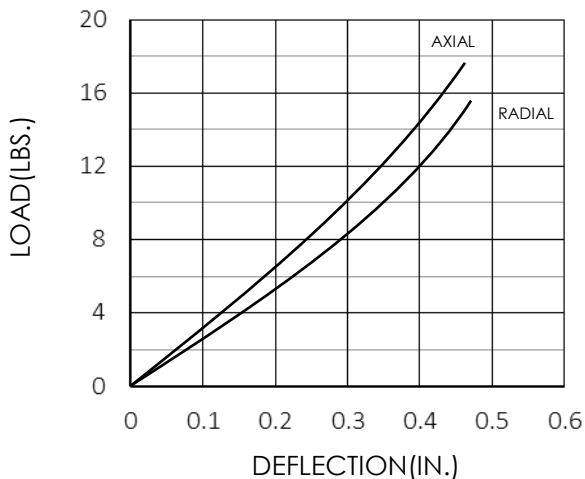
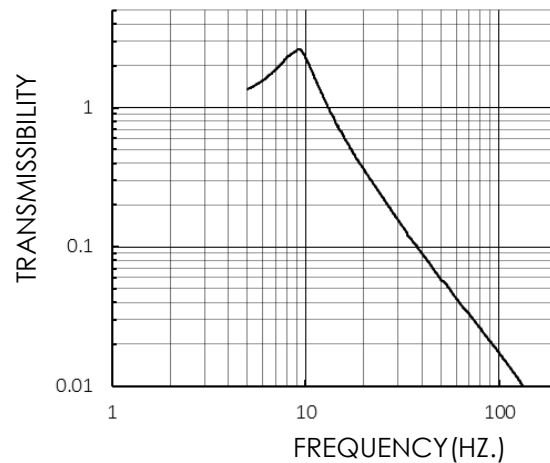


Figure 1: Load Vs. Deflection



**Figure 2: Transmissibility Curve
(7.5lb Mass)**