

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM11-200	3.3	3.6	3.8	45 Degrees	122	2.0
				Compression	282	1.3
				Shear/Roll	221	1.4
ICM11-235	3.6	3.8	5.0	45 Degrees	77	2.5
				Compression	179	1.6
				Shear/Roll	144	1.7
ICM11-270	4.2	4.2	5.2	45 Degrees	34	3.1
				Compression	125	2.2
				Shear/Roll	107	2.3
ICM11-345	5.0	4.9	5.8	45 Degrees	27	4.5
				Compression	64	3.0
				Shear/Roll	55	3.1

Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

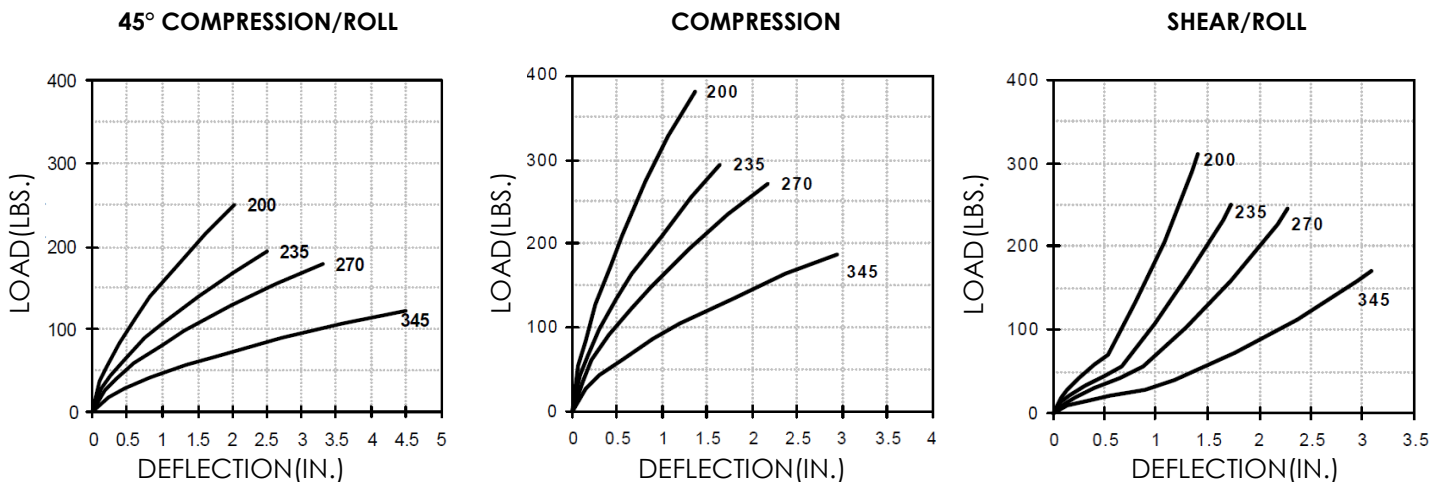


Figure 1: Load Vs. Deflection in each Load Mode