

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM14-235	3.6	4.1	5.1	45 Degrees	160	2.4
				Compression	371	1.6
				Shear/Roll	277	1.7
ICM14-270	4.1	4.3	5.5	45 Degrees	101	3.0
				Compression	234	2.0
				Shear/Roll	179	2.1
ICM14-345	5.0	5.0	5.9	45 Degrees	50	4.5
				Compression	116	2.9
				Shear/Roll	97	3.1
ICM14-430	6.1	5.9	6.8	45 Degrees	27	5.9
				Compression	63	3.9
				Shear/Roll	52	4.1

### Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

### Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

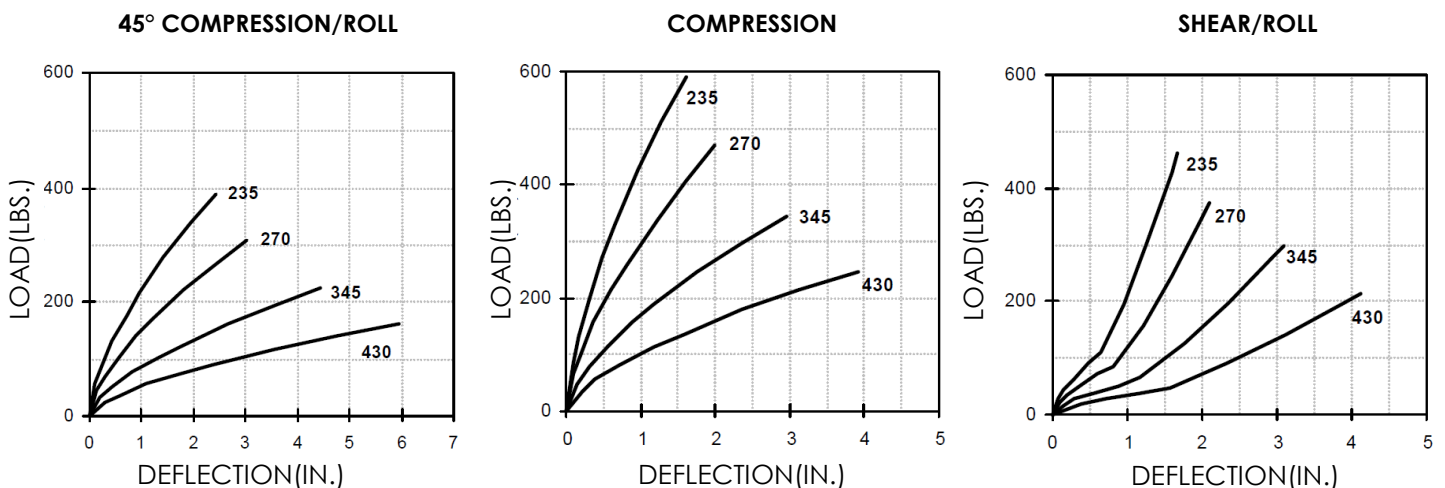


Figure 1: Load Vs. Deflection in each Load Mode