

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM15-315	5.2	5.2	6.9	45 Degrees	127	3.2
				Compression	293	2.1
				Shear/Roll	232	2.2
ICM15-415	6.5	6.1	7.5	45 Degrees	60	5.1
				Compression	139	3.4
				Shear/Roll	122	3.6
ICM15-515	7.6	7.0	8.3	45 Degrees	35	6.7
				Compression	82	4.4
				Shear/Roll	71	4.6
ICM15-615	8.8	7.9	9.2	45 Degrees	22	8.4
				Compression	51	5.6
				Shear/Roll	45	5.8

Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

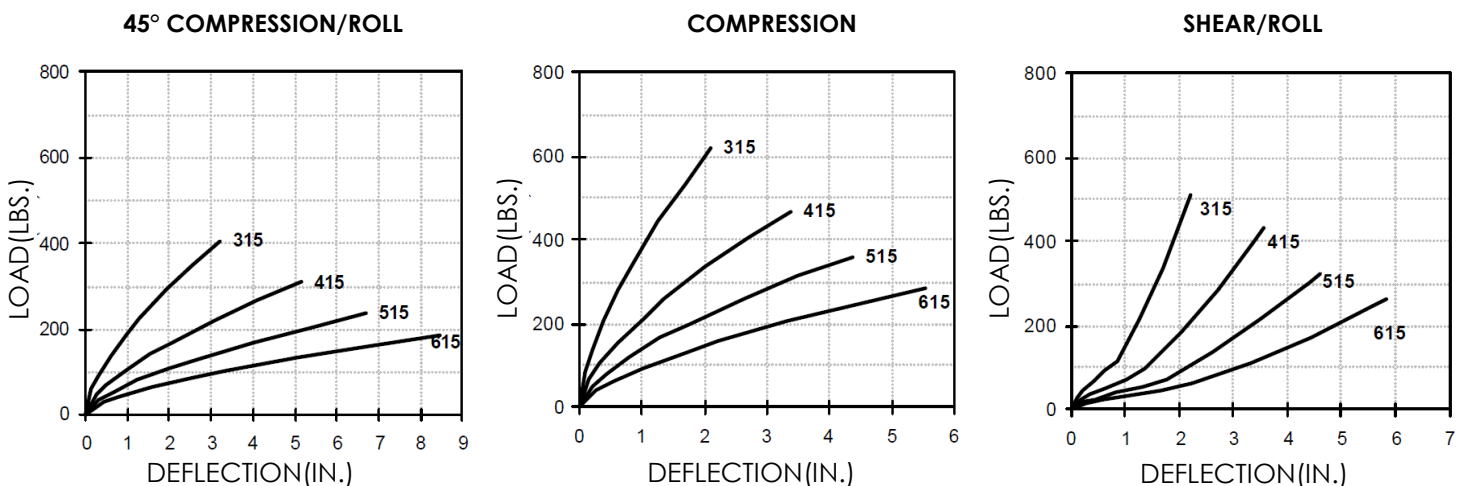


Figure 1: Load Vs. Deflection in each Load Mode