

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM4-90	1.5	1.8	2.2	45 Degrees	15	0.9
				Compression	34	0.6
				Shear/Roll	30	0.6
ICM4-120	1.9	2.1	2.5	45 Degrees	7	1.4
				Compression	16	0.9
				Shear/Roll	15	1.0
ICM4-145	2.2	2.3	2.7	45 Degrees	4	1.9
				Compression	10	1.2
				Shear/Roll	9	1.3
ICM4-195	2.8	2.7	3.1	45 Degrees	2	2.8
				Compression	5	1.8
				Shear/Roll	5	1.9

Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

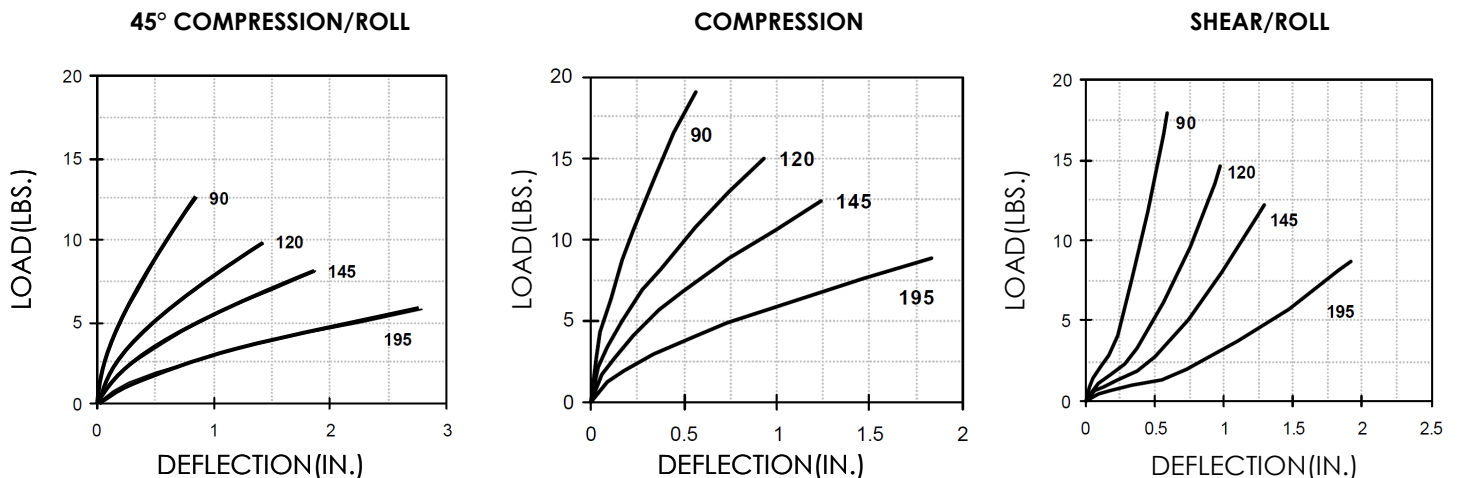


Figure 1: Load Vs. Deflection in each Load Mode