

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM6-90	1.6	1.9	2.4	45 Degrees	48	0.9
				Compression	112	0.6
				Shear/Roll	97	0.6
ICM6-120	2.0	2.1	2.6	45 Degrees	23	1.4
				Compression	53	0.9
				Shear/Roll	50	1.0
ICM6-145	2.3	2.4	2.8	45 Degrees	14	1.9
				Compression	33	1.2
				Shear/Roll	31	1.3
ICM6-195	2.9	2.8	3.2	45 Degrees	7	2.8
				Compression	16	1.8
				Shear/Roll	15	1.9

Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

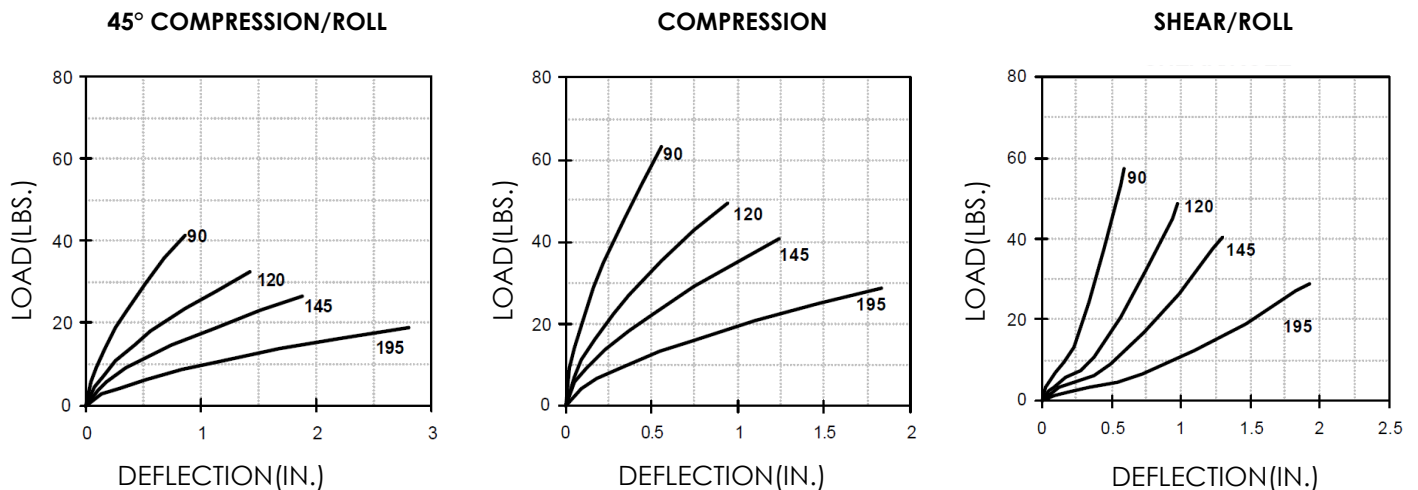


Figure 1: Load Vs. Deflection in each Load Mode