

Resilient Element	Part Number	Load Rating (lbs.)	Natural Frequency (0.60 in DA)	Max Transmissibility
VHDS Silicone	TM11-S01	10	22 Hz	4.5
	TM11-S02	15	22 Hz	4.5
	TM11-S03	20	22 Hz	4.5
Fluorosilicone	TM11-F01	10	22 Hz	4.5
	TM11-F02	15	22 Hz	4.5
	TM11-F03	20	22 Hz	4.5

Table 1: Performance Characteristics

Materials:

- Metal Parts: Aluminum
- Resilient Element: See Left

Operating Temperature:

- VHDS Silicone: -60°F to 300°F

Natural Frequency:

- 20 to 40 Hz

Axial/Radial Frequency Ratio:

- 1 : 1 Approximately

Weight:

- 2.7 oz.

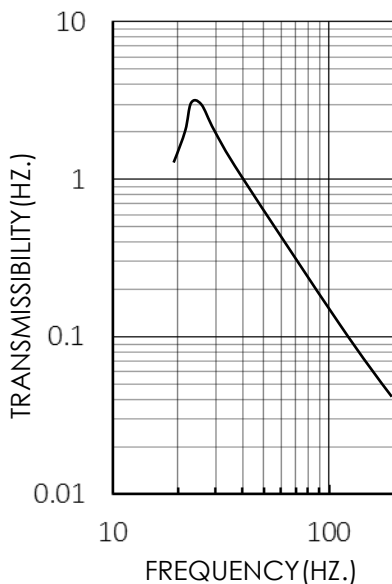


Figure 1: Transmissibility Curve

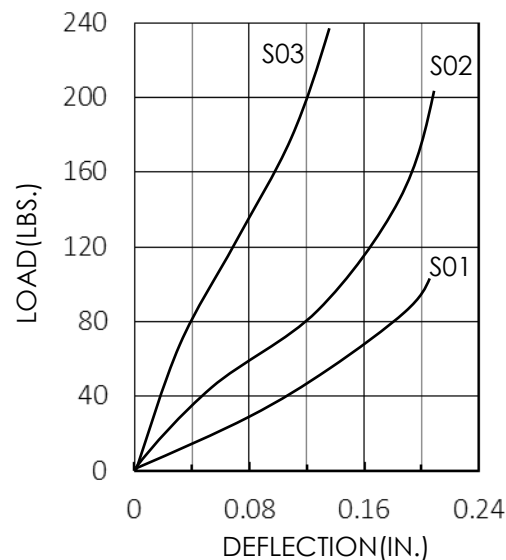


Figure 2: Load Vs. Deflection (Axial)

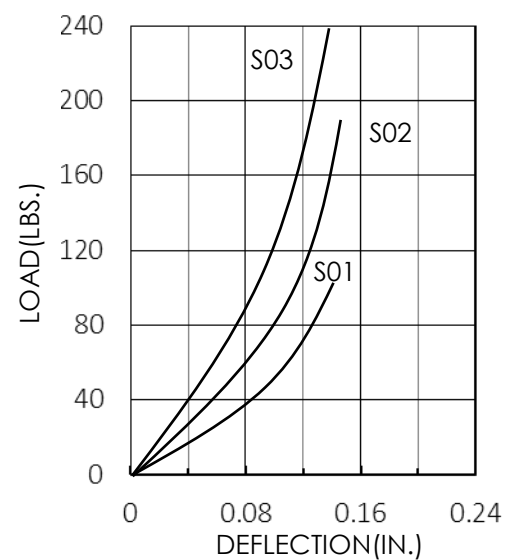


Figure 3: Load Vs. Deflection (Radial)