

Part Number	Load Rating (lbs.)	Max Transmissibility
TM22-S01	1	4
TM22-S02	2	4
TM22-S03	3	4
TM22-S04	5	4

Table 1: Performance Characteristics

Materials:

- Cup: Aluminum
- Core: Zinc Plated Steel
- Resilient Element: VHDS Silicone

Operating Temperature:

- -60°F to 300°F

Natural Frequency:

- 20 to 40 Hz

Axial/Radial Frequency Ratio:

- 1 : 1 Approximately

Loaded Height:

- 0.91 in. Minimum

Weight:

- 1.1 oz.

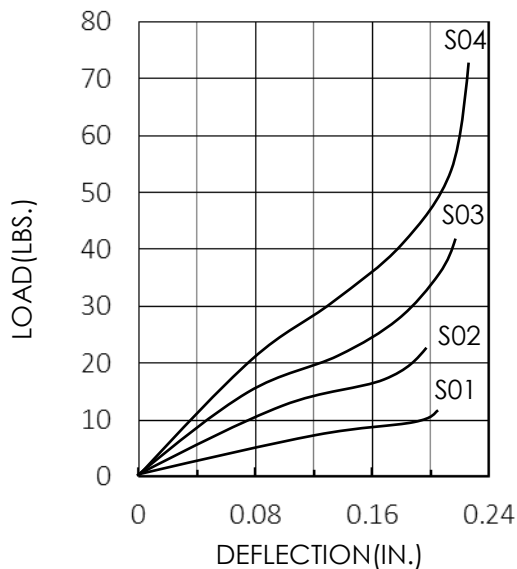


Figure 1: Load Vs. Deflection

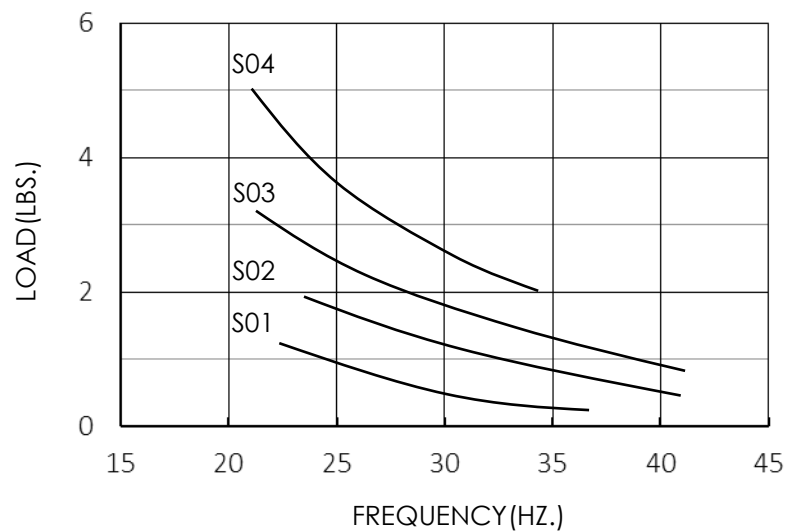


Figure 2: Load Vs. Frequency