

Part Number	Load Rating (lbs.)	Max Transmissibility
TM44-S01	10	4
TM44-S02	15	4
TM44-S03	20	4

Table 1: Performance Characteristics

### Materials:

- Cup: Stainless Steel
- Core: Aluminum
- Resilient Element: VHDS Silicone

### Operating Temperature:

- -60°F to 300°F

### Natural Frequency:

- 20 to 40 Hz

### Axial/Radial Frequency Ratio:

- 1 : 1 Approximately

### Loaded Height:

- 1.19 in. Minimum

### Weight:

- 2.8 oz.

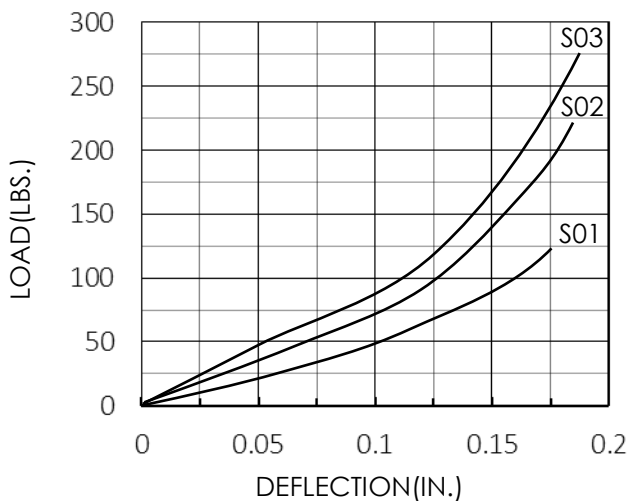


Figure 1: Load Vs. Deflection

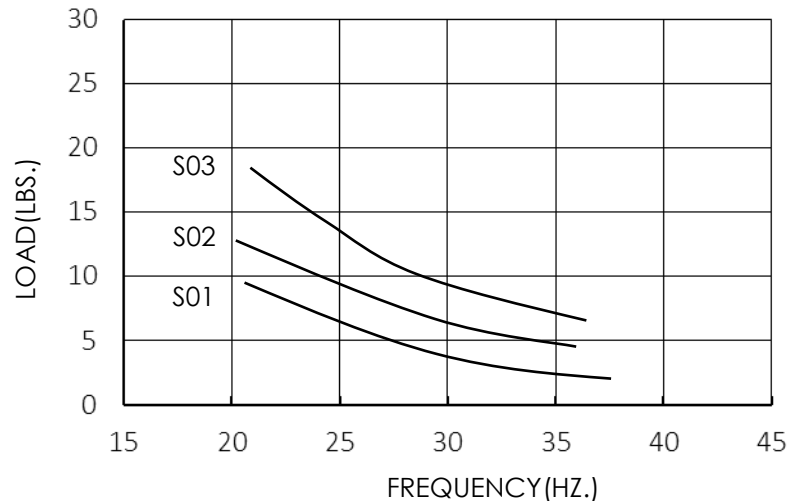


Figure 2: Load Vs. Frequency