

Part Number	Load Rating (lbs.)	Max Transmissibility
TM64-S00	20	4
TM64-S01	35	4
TM64-S02	50	4
TM64-S03	80	4

**Table 1: Performance Characteristics**

**Materials:**

- Cup: Stainless Steel
- Core: Aluminum
- Resilient Element: VHDS Silicone

**Operating Temperature:**

- -60°F to 300°F

**Natural Frequency:**

- 15 to 35 Hz

**Axial/Radial Frequency Ratio:**


- 1 : 1 Approximately

**Loaded Height:**


- 1.25 in. Minimum

**Weight:**

- 5.3 oz.

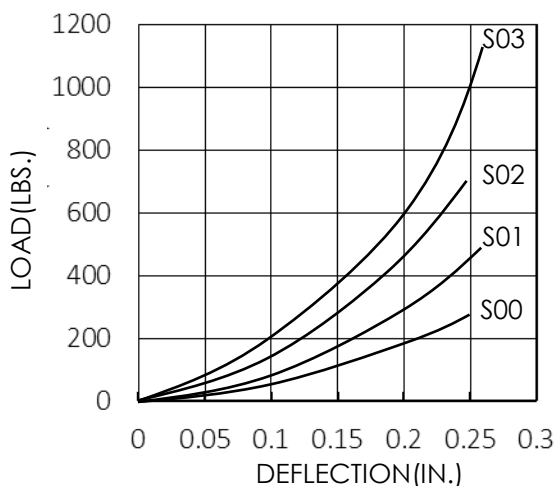

**Figure 1: Load Vs. Deflection**

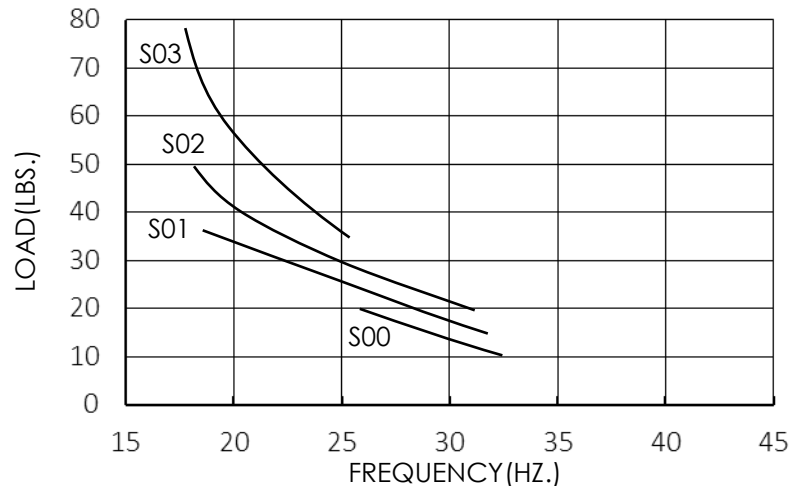

**Figure 2: Load Vs. Frequency**