

Part Number	Load Rating (lbs.)	Transmissibility at Resonance
WM1201-1	1.0 — 3.0	4
WM1201-2	2.5 — 5.0	
WM1201-3	5.0 — 10	
WM1202-1	2.0 — 6.0	4
WM1202-2	5.0 — 12	
WM1202-3	10 — 20	
WM1202-4	17 — 40	
WM1202-5	35 — 50	

**Table 1: Performance Characteristics**

**Materials:**

- Inner Core: Stainless Steel
- Housing & Base: Aluminum
- Resilient Element: Steel Cushion

**Operating Temperature:**


- -100°F to 400°F

**Natural Frequency:**

- 15 to 25 Hz

**Weight:**

- 0.65 to 0.75 oz.

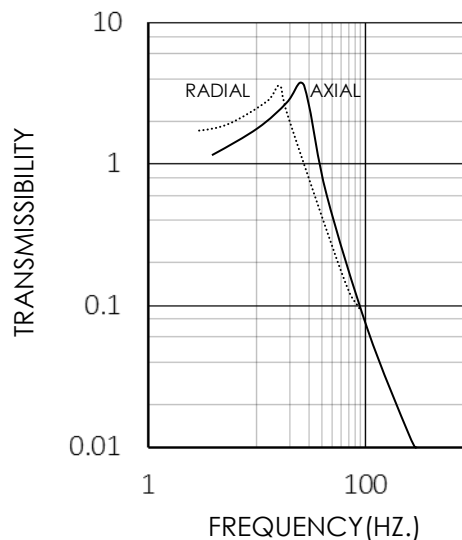

**Figure 1: Transmissibility Curve**