

Part Number	Load Rating (lbs.)	Transmissibility at Resonance
WM7001-H	0.55 — 1.0	4
WM7001-J	0.75 — 1.75	
WM7001-K	1.5 — 3.25	
WM7001-L	2.25 — 5.5	
WM7001-M	4.5 — 10	
WM7002-G	1.5 — 2.75	4
WM7002-H	2.5 — 5.0	
WM7002-J	4.4 — 10	
WM7002-K	6 — 12.25	
WM7002-L	10 — 20	
WM7002-U	15 — 30	
WM7002-M	17.5 — 40	
WM7002-P	25 — 48	
WM7002-R	40 — 72.5	
WM7002-S	60 — 100	
WM7002-T	85 — 130	

Table 1: Performance Characteristics

Materials:

- Inner Core:
Aluminum [WM7001]
Stainless Steel [WM7002]
- Housing & Base: Aluminum
- Resilient Element: Steel
Cushion

Operating Temperature:

- -100°F to 400°F

Natural Frequency:

- 7 to 10 Hz

Weight:

- 1.4 to 4.4 oz.

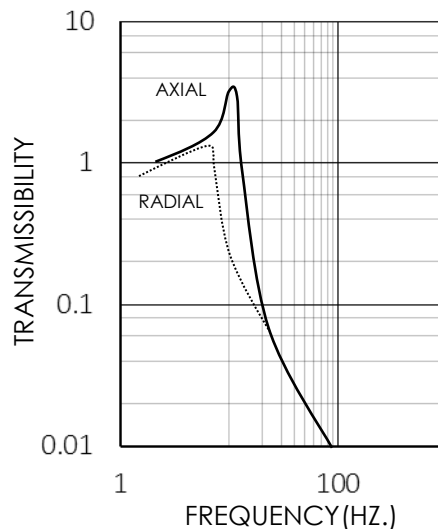


Figure 1: Transmissibility Curve